


TH-5 Root Hammer

TH-5 Root Hammer Series

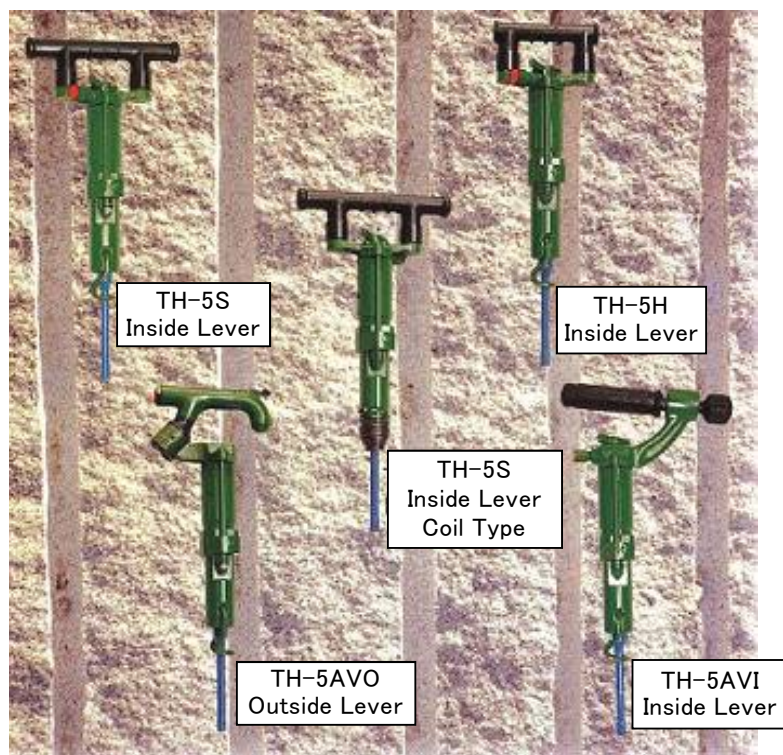

Application

Incomparable performance for cutting out wall stone and stone materials, breaking concrete, boulder stones, and bed rocks, and anchoring, slope mending, mining, tunneling works.



Taper Shank Adapter

※Concrete drill bits can be used via this adapter.



Vibration-proof Handle




※Vibration-proof handles are attachable to TH-5H.

Root Hammer Specifications

| Model | Length | Weight | Air Consumption | Hose Inside Diameter | Max. Drilling Diameter |
|--------------------------|--------|--------|-------------------------|----------------------|------------------------|
| TH-5S | 424mm | 5.8kg | 0.85m ³ /min | 13mm | 40mm |
| TH-5H | 424mm | 5.8kg | 0.85m ³ /min | 13mm | 40mm |
| TH-5AVO | 437mm | 6.0kg | 0.85m ³ /min | 13mm | 40mm |
| TH-5AVI | 458mm | 7.3kg | 0.85m ³ /min | 13mm | 40mm |
| (Coil Type) TH-5S(H)C | 424mm | 5.8kg | 0.85m ³ /min | 13mm | 40mm |

Chemical Anchor Attachment

※Various size of chemical anchors can be screwed via this attachment attached to a 19T rod.



※Available in sizes 12.7mm, 19.0mm, 25.0mm.

Features

- ◎ Improved model of TH-800, power up!! High drilling force notably improves work efficiency.
- ◎ With drilling force increase, components are improved and the durability increased even more. This is a tough and long lasting economical root hammer.
- ◎ The reputable butterfly valve is further improved and employed, and nasty jams no longer occur.
- ◎ The direction of rotation is changed from left handed to right handed, and it can be used for screwing chemical anchors and anchor bolts.

2008.5.30



* Specifications may change without any notice for product improvement.