


Straight Bits

Supposed to be connected to Tapered Rod, Used for drilling small holes.

Good for transport, Easy to replace when it breaks or needs to be sharpened.


●TC15

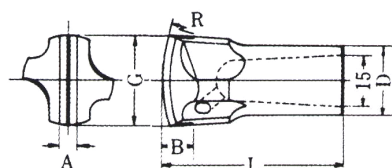

Unit (mm)

Model	G	L	D	A	B	R	Cutting Angle
TC15-20	20	65	18	6	10	110	110°
TC15-21	21	65	18	6	10	110	110°
TC15-22	22	65	18	6	10	110	110°


●TC19

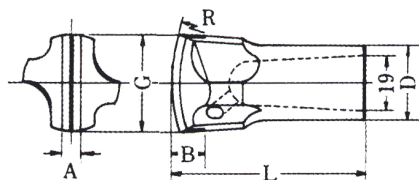

Unit (mm)

Model	G	L	D	A	B	R	Cutting Angle
TC19-24	24	65	22	6	11	110	110°
TC19-26	26	65	24	6	11	110	110°
TC19-28	28	65	25	6	11	110	110°
TC19-30	30	65	25	6	11	110	110°
TC19-32	32	65	27	6	11	110	110°
TC19-34	34	65	28	6	11	110	110°
TC19-36	36	65	28	6	11	110	110°
TC19-38	38	65	30	6	11	110	110°

●TC22

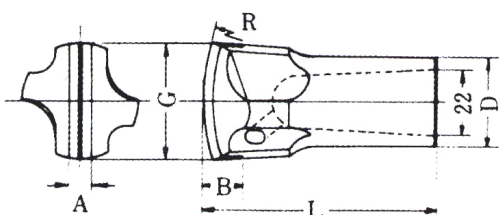

Unit (mm)

Model	G	L	D	A	B	R	Cutting Angle
TC22-28	28	70	25	7	11	110	110°
TC22-30	30	70	27	7	11	110	110°
TC22-32	32	70	27	8	11	110	110°
TC22-34	34	70	29	8	11	110	110°
TC22-36	36	70	29	8	11	110	110°
TC22-38	38	73	33	8	11	110	110°
TC22-40	40	73	33	8	11	110	110°
TC22-42	42	73	33	8	11	110	110°
TC22-44	44	78	33	8	11	110	110°
TC22-46	46	78	33	8	11	110	110°
TC22-48	48	78	33	8	11	110	110°

2009.2.7



HIRADO

* Specifications may change without any notice for product improvement.